



**RANGE OF SCREW COMPRESSORS 3-37 Kw**  
SCB BELT DRIVEN  
ECB BELT DRIVEN VARIABLE SPEED





## I.E.S (Innovative Energy Solutions)

Twenty years of experience acquired in the field of compressed air have allowed IES to plan a complete range of systems for supplying compressed air: plants for production, treatment and distribution, particularly innovative and elegant, which combine the merits of quality and reliability with a particular attention to the user's requirements. As well as offering a complete range of technological solutions for compressed air production, IES is committed to understanding your sector, your requirements and your production and service needs, to ensure you of the best solutions for achieving your business.

Energy saving is the inspiring principle of our design: IES innovative products are based on sustainability, creating an opportunity to guarantee new solutions for long-term business strategies.



## ECB - SCB Line

SILENT - COMPLETE - COMPACT

**ies**  
AIR COMPRESSOR

Basic  
Version



IES compressed air units supply a continuous, reliable flow of compressed air directly to the point of use without requiring a dedicated room.

The ECB - SCB range, made according to high quality standards, uses components by leading companies on the market, ensuring reliability and traceability.

The use of an efficient radial fan and of appropriate acoustic technical solutions allows a reduced level of noise.

The new "Boost Cooling" concept is an additional integrated system for motor ventilation, able to withstand extreme environmental conditions.

Maximum ease of intervention, thanks to the "Full Access" system that allows complete and easy access to all internal components, so that maintenance personnel no longer have to be contortionists: with IES everything becomes easier.


Two thousand two hundred and forty litres of air per minute, dried and stored in a tank of only 0.72 m<sup>2</sup>, this is the first great saving in the optimum use of surfaces.

Basic  
Version  
Plus Tank



Basic  
Version Plus  
Dryer and Tank



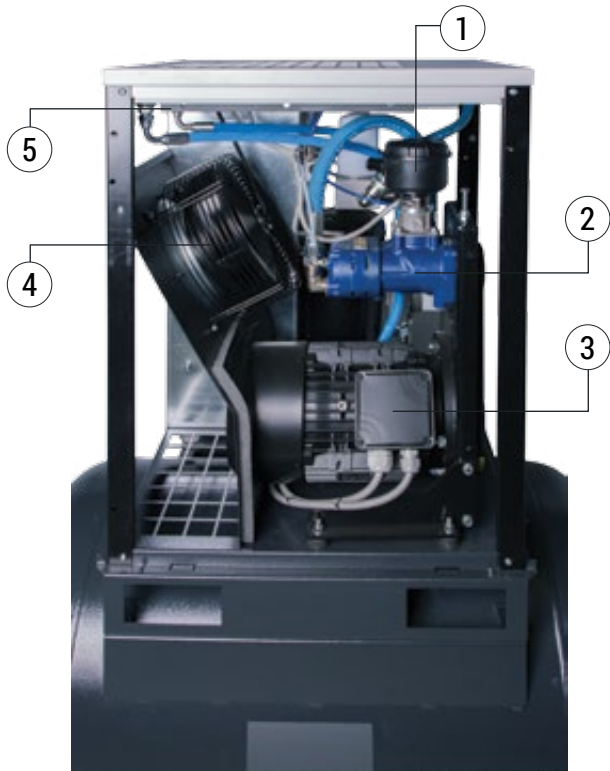

- ① **Suction filter** able to remove the smallest particles of dust, the large surface ensures a long life and minimum pressure loss.
- ② Lubricated single-stage **screw compressor element** produced for maximum efficiency and excellent reliability.
- ③ High efficiency **electric motor** (IE3) IP55 class F able to guarantee long-lasting operation.
- ④ Low-speed **radial fan** able to generate a high flow of cooling air while maintaining low noise.
- ⑤ **Air/oil cooler** generously resized to ensure optimum working temperatures in any environmental condition, easy to clean.



- ⑥ **Air/oil separator filter** able to ensure an impurity residue of 2 ppm, reducing maintenance times.
- ⑦ **Air/oil separator tank** the exclusive cyclone technology guarantees a pre-separation efficiency of more than 99.9%. Provided with optional oil heater.
- ⑧ **PolyV belt transmission system** allows high efficiency and long life, thanks to the large contact surface.



Simplicity and ease in starting thanks to:

- Star-delta starter,
- Pressure gauge,
- Hour counter,
- Temperature alarm.

“eControl” optional electronic control unit:

- Clear and rational display
- Setting and control of the main working parameters:
- Working pressure and temperatures
  - Maintenance times
  - Control of compressor network
  - Weekly timing (optional)



The “D” version includes a built-in cooling dryer that offers an excellent air quality, allowing an appreciable reduction of the installation costs and of the space needed.

**SCB 22-37  
ECB 22**



**BASIC VERSION**

Model	Dimensions
SCB 3	653 x 564 x 855
SCB 4	653 x 564 x 855
SCB 5,5	653 x 564 x 855
ECB - SCB 7,5	653 x 564 x 855
ECB - SCB 11	753 x 604 x 955
ECB - SCB 15	753 x 604 x 955



**BASIC VERSION PLUS DRYER**

Model	Dimensions
SCB 3/D	863 x 564 x 855
SCB 4/D	863 x 564 x 855
SCB 5,5/D	863 x 564 x 855
ECB - SCB 7,5/D	863 x 564 x 855
ECB - SCB 11/D	1013 x 604 x 955
ECB - SCB 15/D	1013 x 604 x 955



**BASIC VERSION PLUS TANK**

Model	Dimensions
SCB 3/270	1184 x 606 x 1474
SCB 4/270	1184 x 606 x 1474
SCB 5,5/270	1184 x 606 x 1474
ECB - SCB 7,5/270	1184 x 606 x 1474
ECB - SCB 7,5/470	1950 x 606 x 1574
ECB - SCB 11/270	1213 x 606 x 1574
ECB - SCB 11/470	1950 x 606 x 1574
ECB - SCB 15/270	1213 x 606 x 1574
ECB - SCB 15/470	1950 x 606 x 1574



**BASIC VERSION PLUS DRYER AND TANK**

Model	Dimensions
SCB 3/270/D	1184 x 606 x 1474
SCB 4/270/D	1184 x 606 x 1474
SCB 5,5/270/D	1184 x 606 x 1474
ECB - SCB 7,5/270/D	1184 x 606 x 1474
ECB - SCB 7,5/470/D	1950 x 606 x 1574
ECB - SCB 11/270/D	1213 x 606 x 1574
ECB - SCB 11/470/D	1950 x 606 x 1574
ECB - SCB 15/270/D	1213 x 606 x 1574
ECB - SCB 15/470/D	1950 x 606 x 1574



**BASIC VERSION PLUS DRYER**

Model	Dimensions
ECB - SCB 22	1400 x 760 x 1150
ECB - SCB 22 - D*	1400 x 760 x 1150
SCB 30	1570 x 835 x 1426
SCB 30 - D*	1570 x 835 x 1426
SCB 37	1570 x 835 x 1426
SCB 37 - D*	1570 x 835 x 1426

\*Dryer

## SCB 3-37

MODEL	PRESSURE MAX,		F.A.D.		POWER		NOISE LEVEL	WEIGHT
	bar	Psig	m <sup>3</sup> /min	c.f.m.	kw	hp	dB(A)	Kg
SCB 3	10	145	0,36	13	3	4	63	120
SCB 4	10	145	0,51	18	4	5,5	63	125
SCB 5,5	10	145	0,72	26	5,5	7,5	64	132
SCB 7,5	10	145	1,00	35	7,5	10	67	135
SCB 11-8	8	116	1,80	63	11	15	67	180
SCB 11-10	10	145	1,58	56	11	15	67	180
SCB 15-8	8	116	2,24	79	15	20	67	185
SCB 15-10	10	145	2,00	71	15	20	67	185
SCB 22-8	8	116	3,70	131	22	30	70	480
SCB 22-10	10	145	3,20	113	22	30	70	480
SCB 30-8	8	116	4,80	170	30	40	72	600
SCB 30-10	10	145	4,30	152	30	40	72	600
SCB 37-8	8	116	5,60	198	37	50	72	640
SCB 37-8	10	145	5,00	177	37	50	72	640

The air flow rates have been measured at the following working pressures:

7,5 BAR FOR MOD. 8 BAR - 9,5 BAR FOR MOD. 10 BAR.

THE DATA AND PERFORMANCES WERE RECORDED IN ACCORDANCE WITH STANDARD ISO 1217.

NOISE LEVEL MEASURED ACCORDING TO PNEUROP/CAGI.

**OPTIONAL MAX. PRESSURE 13-15 BAR**

## ECB 7,5-22

MODEL	PRESSURE MAX,		F.A.D.		POWER		NOISE LEVEL	WEIGHT
	bar	Psig	m <sup>3</sup> /min	c.f.m.	kw	hp	dB(A)	Kg
ECB 7,5	8	116	0,24 - 1,10	8,50 - 38,80	7,5	10	67	145
ECB 7,5	10	145	0,24 - 0,92	8,5 - 32,50	7,5	10	67	145
ECB 11	8	116	0,53 - 1,66	18,70 - 58,60	11	15	67	190
ECB 11	10	145	0,50 - 1,43	17,70 - 50,50	11	15	67	190
ECB 15	8	116	0,53 - 2,20	18,71 - 77,70	15	20	67	195
ECB 15	10	145	0,53 - 1,95	18,71 - 68,86	15	20	67	195
ECB 22	8	116	0,60 - 3,60	21,18 - 127,12	22	30	70	495
ECB 22	10	145	0,40 - 3,00	14,12 - 105,93	22	30	70	495

The air flow rates have been measured at the following working pressures:

7,5 BAR FOR MOD. 8 BAR - 9,5 BAR FOR MOD. 10 BAR.

THE DATA AND PERFORMANCES WERE RECORDED IN ACCORDANCE WITH STANDARD ISO 1217.

NOISE LEVEL MEASURED ACCORDING TO PNEUROP/CAGI.

**OPTIONAL MAX. PRESSURE 13-15 BAR**





## iNNOVATIVE eNERGY SOLUTION



AUTHORIZED DEALER

**IES S.r.l.**

**Registered office**  
Via M. Kolbe, 15  
37044 Legnago (VR) – ITALY

**Operating office**  
Via del Lavoro, 19  
37030 Terrossa di Roncà (VR) – ITALY  
Tel. +39 045 7460775

email: [info@iesair.com](mailto:info@iesair.com) [www.iesair.com](http://www.iesair.com)



**AIR COMPRESSOR**